
PRESLIA SE JET



Turbine



Synthetic oil for aeroderivative industrial turbines.

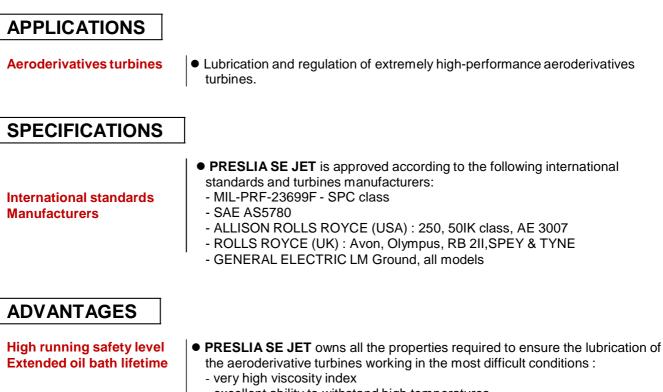

- excellent ability to withstand high temperatures
- excellent thermal and oxydation resistance
- low pour point
- very high air-release and anti-foaming properties.

TYPICAL CHARACTERISTICS	METHODS	UNITS	PRESLIA SE JET
Density at 15 °C	ISO 3675	kg/m ³	998
Viscosity at - 40 °C	ASTM D 2532	mm²/s	9400
Viscosity at 40 °C	ISO 3104	mm²/s	25
Viscosity at 100 °C	ISO 3104	mm²/s	5.1
Viscosity index	ISO 2909	-	135
Pour point	ISO 3016	°C	- 60
Cleveland flash point	ISO 2592	°C	265
Fire point	ISO 2592	°C	300

Above characteristics are mean values given as an information.

TOTAL Specialties USA, Inc.

Linden, NJ 07036 5 North Stiles Street 1-800-323-3198 www.totalspecialties.com

PRESLIA 7-2016

This lubricant must be applied as recommended and used for the application for which it was designed. TOTAL Specialties USA, Inc. will have no responsibility for any injury to persons or property resulting from misuse or misapplication of the lubricant. A safety data sheet conforming to the OSHA Hazard Communication Standard 29 CFR Section 1910.1200 can be downloaded at www.totalspecialties.com. Copyright 2016 All rights reserved.